

KEYED DEMOLITION NOTES:

1. APPROXIMATE AREA OF INTERIOR FINISHES TO BE REMOVED, INCLUDING EXISTING FLOOR, WALL FINISHES, AND EQUIPMENT, TO ALLOW FOR NEW WORK. REMOVE EXISTING ACCOUSTIC TILE CEILINGS WHERE THEY OCCUR AND LIGHTING- SEE MPE. SEE NEW CONSTRUCTION PLANS FOR SPECIFIC RENOVATION WORK REQUIREMENTS.
2. REMOVE EXIST BRICK AND STONWORK AS REQUIRED TO ALLOW FOR NEW WORK AT BUILDING ENTRANCE. SALVAGE EXIST BRICK AND STONE FOR REUSE IN NEW CONSTRUCTION. REBUILD MASONRY BRICK AND STONWORK OPENINGS TO BE TOOTHED-IN, TYP.
3. REMOVE EXIST BRICK AND STONWORK AS REQUIRED TO ALLOW FOR NEW OPENING. SALVAGE EXIST BRICK AND STONE FOR REUSE IN NEW CONSTRUCTION. REBUILD MASONRY BRICK AND STONWORK OPENINGS TO BE TOOTHED-IN, TYP.
4. LINE OF EXISTING WALL ASSUMED CLAY BLOCK WALLS WITH PLASTER FINISH TO BE REMOVED TO ALLOW FOR NEW WORK, TYP. WHERE SHOWN.
5. REMOVE EXISTING INTERIOR DOOR AND DOOR FRAME. SALVAGE FOR OWNER'S USE, STORE ON-SITE AS DIRECTED.
6. REMOVE EXISTING ALUMINUM FRAME DOUBLE HUNG WINDOWS, TYP.
7. REMOVE EXISTING WINDOWS AS REQUIRED TO ALLOW FOR NEW WORK. PREP MASONRY OPENING TO ALLOW FOR MASONRY INFILL. REF. NEW WORK DRAWINGS, TYP.
8. REMOVE EXISTING DOOR AND DOOR FRAME. SALVAGE FOR OWNER'S USE, STORE ON-SITE AS DIRECTED. PREP WALL OPENING TO RECEIVE NEW INFILL. REF. NEW WORK DRAWINGS.
9. REMOVE EXISTING INTERIOR DOOR AND DOOR FRAME. SALVAGE FOR OWNER'S USE, STORE ON-SITE AS DIRECTED. PREP WALL OPENING TO RECEIVE NEW DOOR AND FRAME.
10. REMOVE EXISTING BRICK AND CONCRETE STAIR TO ALLOW FOR NEW WORK. SALVAGE EXIST BRICK FOR REUSE IN NEW CONSTRUCTION.
11. REMOVE EXIST ROOFING TO ALLOW FOR NEW ROOF.
12. EXISTING ABANDONED CLOSED SKYLIGHT. REMOVE MATERIALS AS REQUIRED TO ALLOW FOR RESTORATION OR REPLACEMENT. CONTRACTOR/ARCHITECT TO SURVEY EXISTING CONDITIONS IN FIELD. TYPICAL OF 4.
13. EXISTING COPPER GUTTERS TO REMAIN, U.O.N.
14. REMOVE SECTIONS OF EXISTING CONCRETE BEARING WALL TO CREATE NEW OPENING AS REQUIRED TO ALLOW FOR NEW WORK- SEE STRUCTURAL DRAWINGS FOR SPECIFIC RENOVATION WORK REQUIREMENTS.
15. LINE OF EXIST WALL, ASSUMED TO BE CMU WALLS, TO BE REMOVED TO ALLOW FOR NEW WORK, TYP. IN GYMNASIUM, U.O.N.
16. LINE OF EXIST WALL, ASSUMED TO BE STUD WALL WITH GWB, TO BE REMOVED TO ALLOW FOR NEW WORK.
17. APPROXIMATE AREA OF EXISTING CONCRETE FLOOR TO BE REMOVED- SEE STRUCTURAL DRAWINGS. REF. NEW CONSTRUCTION PLANS FOR SPECIFIC RENOVATION WORK REQUIREMENTS.
18. REMOVE EXIST ALUMINUM FRAME WINDOWS AT GYMNASIUM. SALVAGE FOR OWNER'S USE, STORE ON-SITE AS DIRECTED, TYP.
19. REMOVE EXIST LOW ROOF AND WALL TO ALLOW FOR NEW WORK.
20. LINE OF EXIST WALL AND ROOF TO BE REMOVED TO ALLOW FOR NEW WORK, TYP. AT GYMNASIUM, TYP.
21. LINE OF EXIST ROOF TO BE REMOVED TO ALLOW FOR NEW ROOF. EXISTING WALL TO REMAIN, TYP.

CLIENT



WOODROW WILSON HIGH SCHOOL

3950 Chesapeake St NW
Washington, DC 20016
T: 202-282-0120

ARCHITECT



cox graae + spack architects

2909 M STREET NW,
WASHINGTON, DC 20007
T: 202-965-7070 F: 202-965-7144

ASSOCIATE ARCHITECTS

Fanning - Howey
210 North Lee Street, Suite 208
Alexandria, VA 22314
T: 703.519.9822 F: 703.519.9823

CONSULTANTS

CIVIL ENGINEERING
Delon Hampton & Associates
8403 Colesville Rd, Suite 600
Silver Spring, MD 20910
T: 301.585.0100 F: 301.585.6486

GEOTECHNICAL ENGINEERING
Thomas L. Brown Associates
1400 Eye Street NW, Suite 440
Washington, DC 20005
T: 202.387.0022 F: 202.682.1367

MEP ENGINEERING
Fanning - Howey
210 North Lee Street, Suite 208
Alexandria, VA 22314
T: 703.519.9822 F: 703.519.9823

STRUCTURAL ENGINEERING
ReStl Designers, INC.
702 Russel Avenue, Suite 400
Gaithersburg, MD 20877
T: 301.257.6872 F: 301.926.3109

REGISTRATION


MARK	DATE	DESCRIPTION
	09.25.2009	Schematic Design Submittal

CGS PROJECT NO.: 2905

DRAWN BY:


CHECKED BY:

GRAPHIC SCALE:

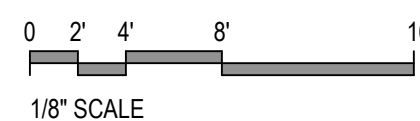


1/8" SCALE

KEY PLAN

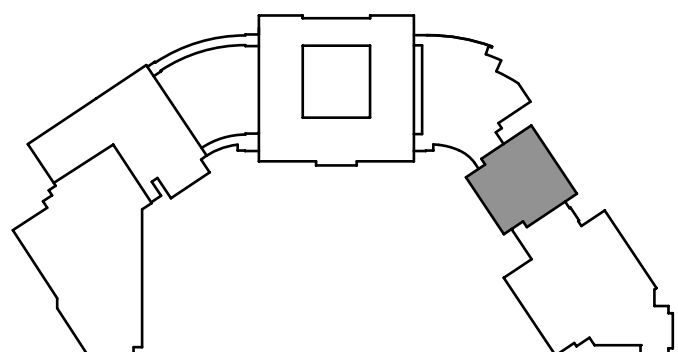

SHEET TITLE

DEMO MEDIA CENTER-
SECOND FLOOR



AD2.21