

KEYED DEMOLITION NOTES:

- EXISTING COPPER DOWNSPOUT AND CONDUCTOR HEAD TO REMAIN U.O.N.
- EXISTING COPPER DOWNSPOUT AND CAST IRON BOOT IN AREA OF NEW CANOPY ROOF TO BE REMOVED TO ALLOW FOR NEW WORK.
- EXISTING COPPER GUTTER TO REMAIN, U.O.N.
- REMOVE EXISTING SECURITY LIGHTING AND SURFACE RUN CONDUITS. ORIGINAL WALL MOUNTED LIGHTS TO REMAIN.
- REMOVE EXISTING WINDOW MOUNTED UNIT ROOM AIR-CONDITIONERS, TYPICAL. SALVAGE FOR REUSE BY OWNER. STORE ON-SITE AS DIRECTED.
- REMOVE EXISTING ALUMINUM FRAME DOUBLE HUNG WINDOWS, TYPICAL.
- EXISTING SLATE ROOFING TO REMAIN, U.O.N. OR REQUIRED FOR NEW WORK.
- EXISTING CUPOLA BEYOND TO REMAIN.
- EXISTING MECHANICAL DUCTWORK TO BE REMOVED, REF. MECH DWGS.
- APPROXIMATE LINE OF EXISTING GRADE. REMOVE CONCRETE, SLABS, CURBS, WALLS AND EARTH AS REQUIRED TO ALLOW FOR WORK AT NEW ENTRANCE.
- REMOVE EXIST BRICK AND STONEWORK AS REQUIRED TO ALLOW FOR NEW WORK AT NEW BUILDING ENTRANCE. SALVAGE EXIST BRICK AND STONE FOR REUSE IN NEW CONSTRUCTION. REBUILT MASONRY BRICK AND STONEWORK OPENINGS TO BE TOOTHED-IN, TYPICAL.
- REMOVE EXISTING STONEWORK AS REQUIRED TO ENLARGE EXISTING MASONRY OPENING AT NEW VISITOR'S ENTRANCE. SALVAGE EXISTING STONE FOR REUSE IN NEW CONSTRUCTION. REBUILT MASONRY OPENINGS TO BE TOOTHED-IN, TYPICAL.
- REMOVE EXISTING STONEWORK AS REQUIRED TO ENLARGE EXISTING MASONRY OPENINGS, TYPICAL OF 5. SALVAGE EXISTING STONE FOR REUSE IN NEW CONSTRUCTION. REBUILT MASONRY OPENINGS TO BE TOOTHED-IN, TYPICAL.
- EXISTING STONE FACED RETAINING WALL TO BE REMOVED TO ALLOW FOR NEW WORK. SALVAGE EXISTING STONE FOR USE IN NEW WORK.
- EXISTING 2 COLOR BRICK MASONRY WALL TO REMAIN U.O.N. REMOVE EXISTING ABANDONED EQUIPMENT AND FIXINGS.
- EXISTING STONE FACED WALL TO REMAIN U.O.N. REMOVE EXISTING ABANDONED EQUIPMENT AND FIXINGS.
- LINE OF EXISTING CONCRETE FOUNDATION WALL TO REMAIN U.O.N.
- NOT USED.
- LINE OF EXISTING CORRIDOR WALL BEYOND. AREA OF EXISTING CONCRETE FOUNDATION FOOTING TO BE REMOVED TO ALLOW FOR NEW GARAGE ACCESS DRIVE. REF. STRUCTURAL DWGS.
- EXISTING DOOR TO BE REMOVED FOR STRIPPING, REPAIR AND REFINISH.
- EXISTING METAL HAND AND GUARDRAILS TO REMAIN.
- EXISTING STONE STAIR TREADS TO REMAIN.
- REMOVE EXISTING CANOPY AND ENTRANCE DOOR.

CLIENT



WOODROW WILSON HIGH SCHOOL

3950 Chesapeake St NW
Washington, DC 20016
T: 202-282-0120

ARCHITECT



cox graae + spack architects
2909 M STREET NW,
WASHINGTON, DC 20007
T: 202-965-7070 F: 202-965-7144

ASSOCIATE ARCHITECTS

Fanning + Howey
210 North Lee Street, Suite 208
Alexandria, VA 22314
T: 703.519.9822 F: 703.519.9823

CONSULTANTS

CIVIL ENGINEERING

Delon Hampton & Associates
8403 Colesville Rd, Suite 600
Silver Spring, MD 20910
T: 301.585.0100 F: 301.585.6486

GEOTECHNICAL ENGINEERING

Thomas L. Brown Associates
1400 Eye Street NW, Suite 440
Washington, DC 20005
T: 202.387.0022 F: 202.682.1367

MEP ENGINEERING

Fanning + Howey
210 North Lee Street, Suite 208
Alexandria, VA 22314
T: 703.519.9822 F: 703.519.9823

STRUCTURAL ENGINEERING

ReStl Designers, INC.
702 Russel Avenue, Suite 400
Gaithersburg, MD 20877
T: 301.257.6872 F: 301.926.3109

REGISTRATION

MARK DATE DESCRIPTION


09.25.2009 Schematic Design Submittal

CGS PROJECT NO.: 2905


DRAWN BY:

CHECKED BY:

GRAPHIC SCALE:




KEY PLAN

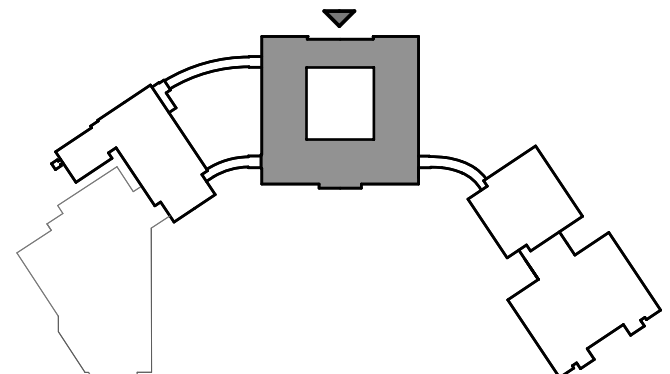

SHEET TITLE

DEMOLITION ACADEMIC
BUILDING ELEVATION



AD6.06